




*- Amps That Sing -*


# AstroDust Operations Manual

Welcome to the RedPlate Family, thank you for your purchase of a RedPlate AstroDust. Please take a moment and review this manual for an understanding of all the available features (or just put all the knobs at noon and play). This Manual applies to AstroDust models produced after 01/15/2012. Check the **Addendum Section** for model differences.

### Signal Path Block Diagram:

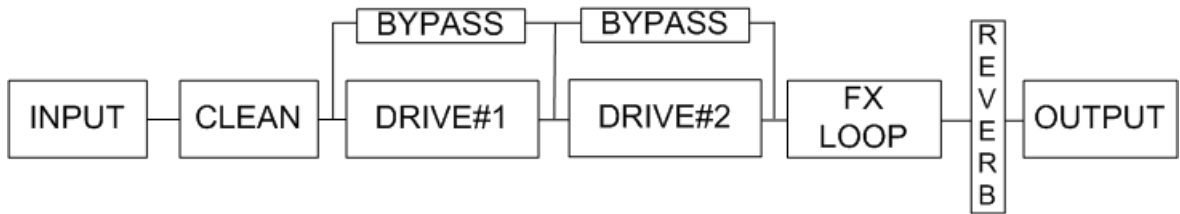


### FRONT PANEL:

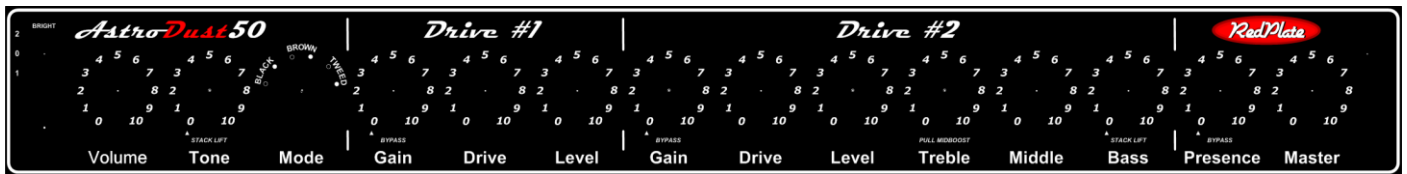

**Input Jack** – Typical High impedance input to the amplifier. Designed to be “Pedal Friendly” in the unlikely event you will ever use a pedal in front of the AstroDust.

### CLEAN PREAMP SECTION

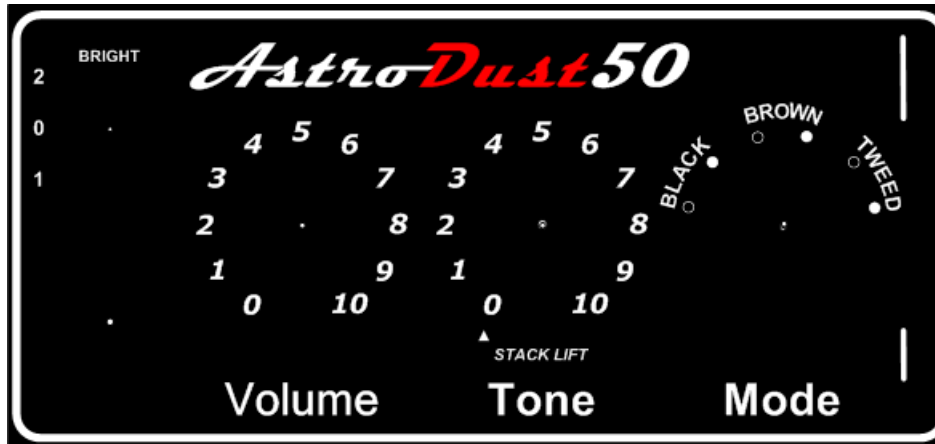

The Clean Preamp is based on the classic Tweed Style design with some important differences:

1. Get into the “sweet spot” and still be able to play at various volume levels and venue sizes.
2. Imitate the more traditional Treble Middle Bass style amps when needed.
3. Footswitch control of preamp Tone (Boost) for instant personality changes.
4. Select the amount of Bass gain appropriate to your guitar choice (via Humbucker/Single coil switch covered in the **Rear Panel** Section of this manual).
5. Fully buffered FX loop.


**Bright Switch** – Center = OFF, Down = sound of new strings, Up = normal Bright response.

**Volume** – Sets the “sweet spot” – adjust this for the amount of character you desire in your tone. Typical setting is between 3 and 5 but experimentation is encouraged.

**Tone** – Treble is emphasized at settings past 5, more bass at the lower numbers. When rotated to zero it clicks off for a full tone lift. The tone lift can also be accessed instantly via the Boost button on the footswitch (see the **Other Features** section of this manual for details).

**Mode Selector** – A six position rotary switch, it steps through 6 progressively fatter positions of midrange and girth. The fattest Tweed setting is position 6.

### DRIVE#1 SECTION

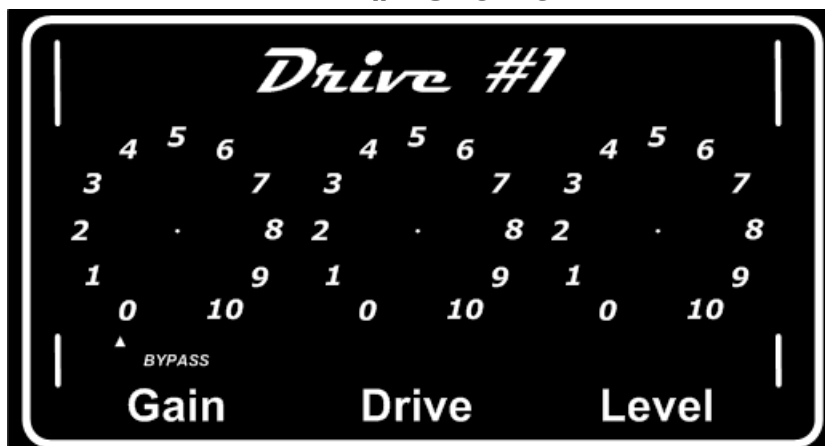

The Drive#1 section can control the amount of character to add to the clean tone. The section’s range of effect can be just a hint of early break up or a full on aggressive heavy metal distortion.

**Gain Control** – Bypasses the section when rotated to zero, this control sets the amount of signal for the first gain stage of the section. Low settings are smoother and higher settings are more aggressive.

**Drive Control** – Sets the amount of distortion by controlling the level between the 2 gain stages of the section.

**Level Control** – Sets the output volume of the section. Higher settings are “bigger” and more 3 dimensional.

### DRIVE#2 SECTION



Because the amplifier sections are in series left to right, this section can be driven by the clean channel or the output of Drive #1. The section’s range of effect is amazingly flexible because of its dedicated tone controls.

**Gain Control** – Bypasses the section when rotated to zero, this control sets the amount of signal for the first gain stage of the section. Low settings are smoother and higher settings are more aggressive.

**Drive Control** – Sets the amount of distortion by controlling the level between the 2 gain stages of the section.


**Level Control** – Sets the output volume of the section. Higher settings are “bigger” and more 3 dimensional.

**Treble Control** - Adjusts highs (also upper midrange when pulled for a “MidBoost” effect).

**Middle Control** – Controls the amount of Midrange frequencies, somewhat interactive with the Bass Control.

**Bass Control** – Sets the amount of low end. Can be rotated to zero where it clicks off for a full tone stack lift.

### MASTER SECTION

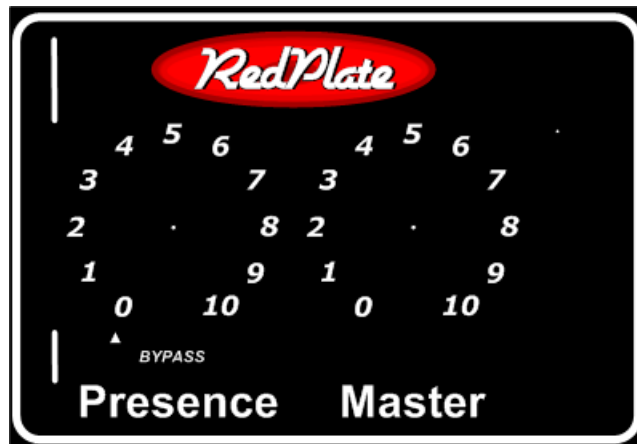


**Presence Control** – The presence circuit uses global negative feedback to remove low frequencies which frees up bandwidth for more midrange and highs. Think of it as a tone control to balance the relationship between highs and lows, especially when the amplifier is naturally producing increased low end at louder volumes. The control clicks off when rotated to zero for no presence.


**Master Volume** – This is an active control and actually adds gain at the higher settings. The cleanest tones are achieved at settings below 7.

## REAR PANEL SECTION

### Domestic (USA):

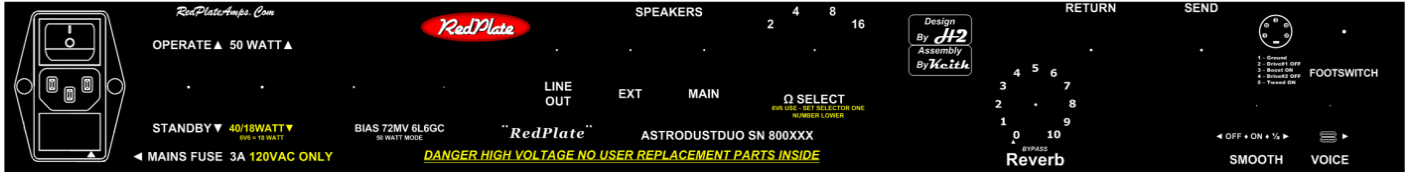

### Rear Panel Export:

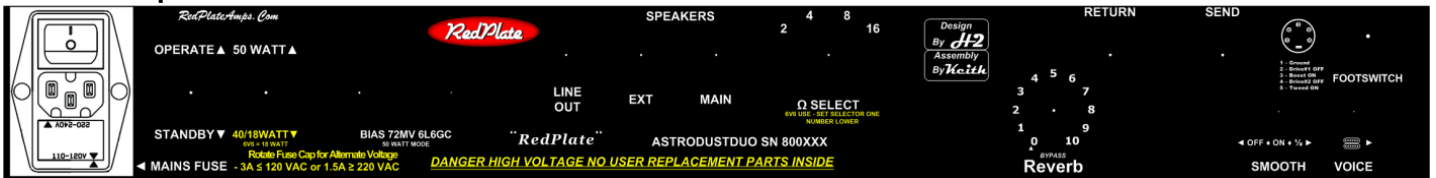

**IEC Module** – contains the main power switch, power cord inlet connector and the fuse drawer which doubles as the voltage selector on export models. To access the fuse(s) use a small flat blade screwdriver in the notch at the bottom of the power cord inlet connector, the drawer snaps out in a rearward direction. The AstroDust can accept both the larger (3AG footprint) or smaller European (5mm X 20mm) fuses. A time delay variety (SLO-BLO) is recommended. Always use the correct value fuse as listed on the rear panel. The fuse drawer can be rotated on the export models for voltage selection, make sure the correct value fuse is located on the same side of the fuse drawer as the desired selection arrow. Line up the appropriate arrow on the fuse drawer with the arrow on the bottom right of the module for the proper VAC selection.

**Standby Switch** – This switch allows the tubes to warm up before operating the amplifier. Wait 1 minute after power on to move it up to the operate position. For improved tube life and performance do not leave the amplifier in Standby position for longer than 20 minutes (better to just leave it in operate mode during performance intermissions).

**50 WATT / 40 WATT Switch or Fixed/Cathode Switch** – (2 6L6 models) This switch changes the bias architecture of the output tubes from fixed bias (50 WATT) to cathode biased (40 WATT).

The 40 WATT position allows the use of 6V6 tubes for less power output (~18 Watts with 6V6).

**Bias adjustment and bias test point** – Allows external access for bias adjustment (see bias procedure in the Maintenance section).

**LINE OUT** – A line level signal jack derived from the speaker output which contains the whole tone of the amplifier.

**Speaker Jacks** – The MAIN and EXT jacks are wired in parallel. The MAIN jack must be used first because it has a protection device. ALWAYS HAVE A SPEAKER CONNECTED TO AVOID PERMANENT AMPLIFIER AND OUTPUT TUBE DAMAGE.

**Impedance Selector Ω** - Set this to the total impedance of all attached speakers.

**Reverb Control** - Sets the amount of reverberation effect, takes the reverb out of circuit when rotated to zero (there will be a slight volume and tone change).

**SEND and RETURN Jacks** – The send jack connects to the input of an external effects device and the return jack connects to the output of an external effects device. The return jack interrupts the signal path so the external effects unit must mix the wet and dry signals.

**Footswitch Jack** - This is a standard 180 degree 5 pin DIN jack for footswitch connection. The pinout is conveniently located on the rear panel for use with automated switcher conversion boxes.


**SMOOTH Switch** – Employs local negative feedback in the clean preamp for a hint of compression. The ½ position is a more extreme setting.

**Humbucker / Single coil Switch** – Sets the amount of bass gain in the input stage, useful for matching the amplifier to the guitar type.

### ***OTHER FEATURES***

The AstroDust comes complete with a 4 button footswitch and a footswitch cable. The cable used is a regular MIDI cable and is readily available in any length at most music stores. If a replacement cable is needed, make sure all 5 wires are supported.

### ***FOOTSWITCH***

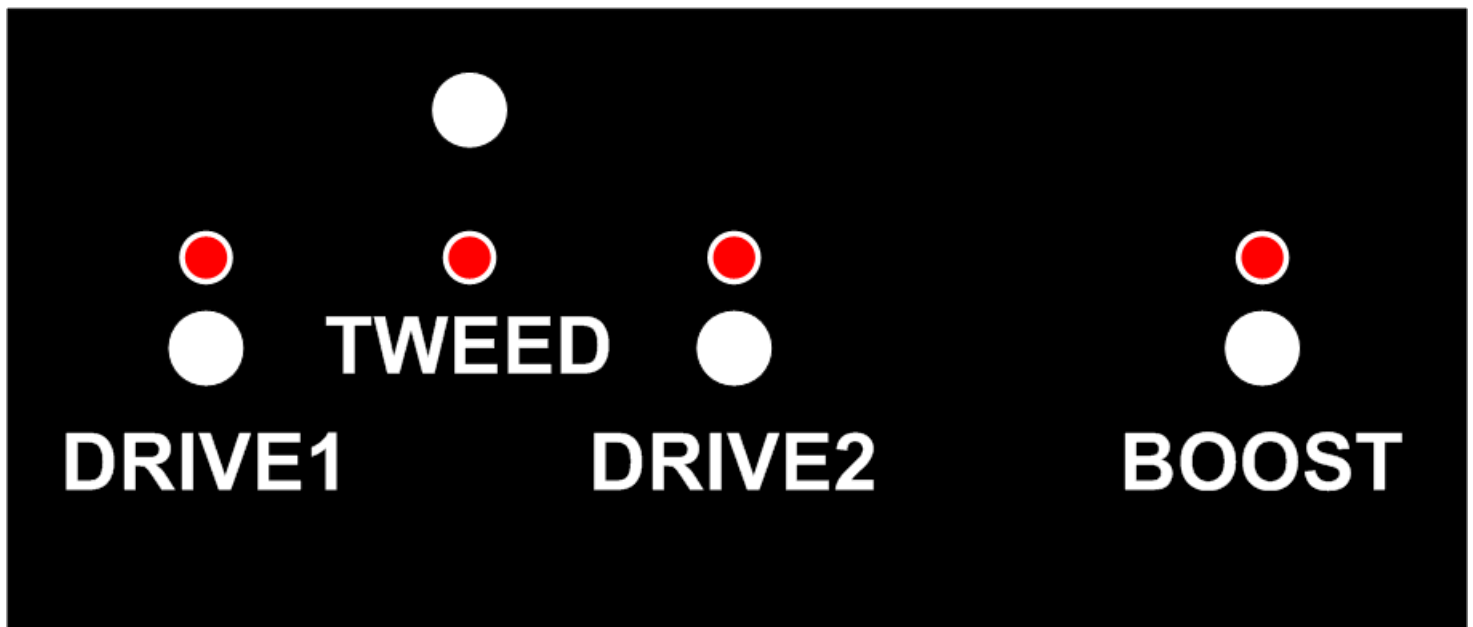

**TWEED** – Same as rotating the MODE control to TWEED for immediate access to the fattest preamp tone. This button has no effect when the MODE control is already in TWEED position.

**DRIVE 1** - The indicator comes on when the Drive #1 section is active. The footswitch button does not work when the front panel Drive #1 Gain control is rotated to zero because it is a duplicate function.

**BOOST** – Girth Boost feature which adds volume and tone by doing a full tone lift. The footswitch button has no effect when the front panel Tone control is rotated to zero because it is a duplicate function.

**DRIVE 2** - The indicator comes on when the Drive #2 section is active. The footswitch button does not work when the front panel Drive #2 Gain control is rotated to zero because it is a duplicate function.

### **POWER ON/OFF PROCEDURE**


1. Check the Standby switch to make sure it is toggled downward for Standby operation.
2. Toggle the main power switch to the up position (this switch is located at the top of the IEC input module). The front panel pilot light should be lit.
3. Wait one minute and then toggle the Standby switch upwards to the Operate position.
4. POWER OFF – Toggle the main power switch downward, there is no need to go into standby first although it will not hurt anything.

### **MAINTENANCE SECTION**

Your AstroDust amp has been designed for years of trouble free operation. The vacuum tubes will need to be replaced over time. We recommend new output tubes every 160 - 240 hours and new preamp tubes every 320 - 480 hours.

The front and rear panels have a protective finish that can be easily scratched with abrasives so always use a damp soft cloth to clean them (never use paper towels). The cabinetry can be cleaned with our super secret tolex cleaner (on a paper towel - 2 squirts of WD-40 and 4 squirts window cleaner), try it next time you clean your stage cables, it makes them look and feel like new.

### **TUBE LAYOUT**

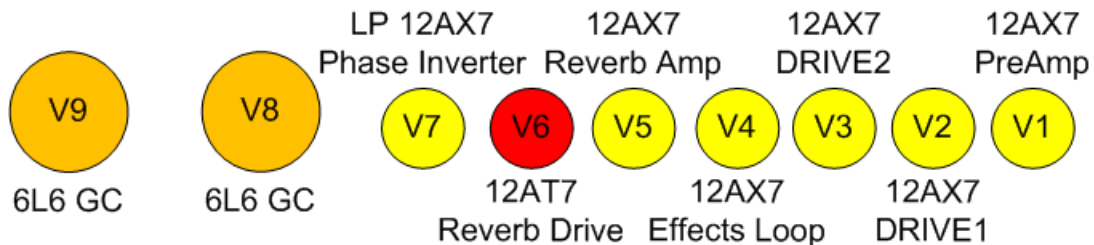

All tube brands are acceptable, a long plate is preferred in the V7 (Phase Inverter) position.

**Warning – No user serviceable parts inside so unless you know what you’re doing please refer to a qualified service person only.**

### **BIAS PROCEDURE**

1. When new 6L6 GC output tubes are installed it is important to re-bias the amp for optimal performance.
2. ALWAYS HAVE A SPEAKER CONNECTED.

3. Use a digital volt meter set to DC volts at lowest scale (MV). Makes sure the black lead is the common terminal of the meter and the read lead is the DC voltage terminal of the meter.
4. Place the Amplifier in operate mode with the Master Volume and Reverb controls set to zero.
5. Set the 50 WATT/ 40 WATT switch to the 50 WATT (Fixed Bias) position.
6. Place the red meter lead in the test point hole (red tip jack) And touch (or clip) the black meter lead on one of the metal output tube retainer clips.
7. Use a small flat blade screwdriver to adjust the bias pot for a reading to match the recommend bias as listed on the rear panel  $\pm 5$  MV. The reading is the sum of the idle current for both output tubes.
8. Recheck the reading after 10 minutes of operation, and again after a week or two of operation.

### INTERNAL TRIM POT



The AstroDust has an internal trim pot for the Phase Inverter tube balance – Useful for working with unmatched 12AX7 tubes in the phase inverter position. Refer to qualified personnel for proper adjustment.

### ADDENDUM


Re: Model **AstroDustDuo88** (with 80 watt KT-88 output section) and **AstroDustDuo24 (6V6 output section)**

This manual is applicable for the above 2 models with the following changes:


1. ADD88 can use 6L6GC with no change in the impedance selector. (see note)
2. ADD24 is output tube type 6V6 only. (see note)

**NOTE: Observe the Bias settings and Fuse ratings written on the rear panel(s) for operating and biasing these amps.**

**AstroDustDuo “R” model –**

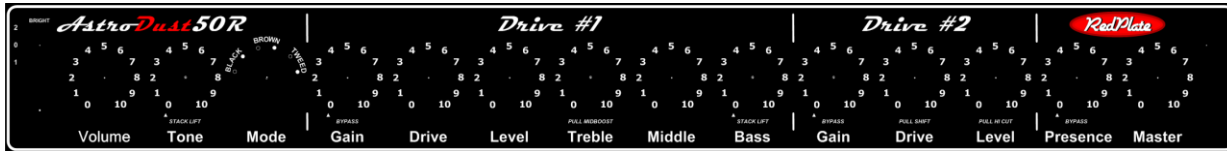

Drive#1 and Drive#2 are in reverse order. Signal Block Diagram is still accurate because the names of the overdrive sections are also changed. Tube Layout is only difference as shown here:

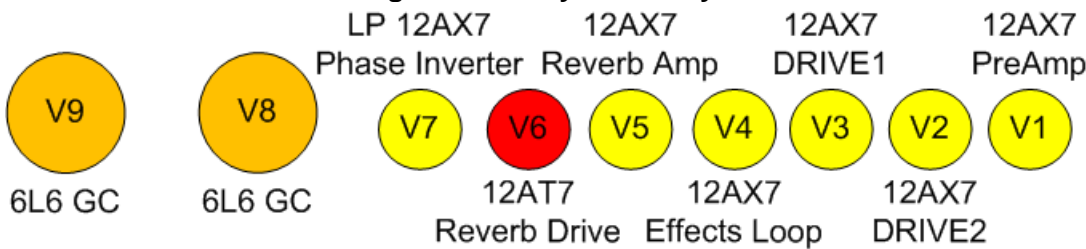

## ***REPLATE WARRANTY***

At RedPlateAmps we pride ourselves making products that are built to last. The workmanship in your RedPlate amplifier is warranted to be problem free for the lifetime of the original owner. The actual electrical components in your amplifier are warranted for a period of 3 years. Exclusions are vacuum tubes, reverb tanks, cables, speakers and cosmetics which are warranted for 30 days. Improper handling or product misuse or product abuse or unauthorized repair work or unauthorized modifications may nullify your warranty. Eligibility for coverage and covered items are at the sole discretion of RedPlateAmps.

**RedPlateAmps**

**[www.RedPlateAmps.com](http://www.RedPlateAmps.com)**

**email: [info@RedPlateAmps.com](mailto:info@RedPlateAmps.com)**

Thanks again for joining the RedPlate Family! – Keith and Henry

## ***BONUS SECTION - SETTINGS TEMPLATE***

[Check the website for future updates to this section]

Copy or print the next page to record your settings. Once you've zeroed in on your signature setting please email the completed template to [Info@RedPlateAmps.com](mailto:Info@RedPlateAmps.com) – we may include your favorite in the online version of this manual.



2	BRIGHT	<b>Drive #1</b>						<b>Drive #2</b>											
0	*	4	5	6	7	8	9	4	5	6	7	8	9	4	5	6	7	8	9
1	*	3	4	5	6	7	8	3	4	5	6	7	8	3	4	5	6	7	8
2	*	2	3	4	5	6	7	2	3	4	5	6	7	2	3	4	5	6	7
3	*	1	2	3	4	5	6	1	2	3	4	5	6	1	2	3	4	5	6
4	*	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5
5	*	RAW 0	10	9	8	7	6	OFF 0	10	9	8	7	6	RAW 0	10	9	8	7	6
6	*	0	10	9	8	7	6	0	10	9	8	7	6	0	10	9	8	7	6
7	*	0	10	9	8	7	6	0	10	9	8	7	6	0	10	9	8	7	6
8	*	0	10	9	8	7	6	0	10	9	8	7	6	0	10	9	8	7	6
9	*	0	10	9	8	7	6	0	10	9	8	7	6	0	10	9	8	7	6
10	*	0	10	9	8	7	6	0	10	9	8	7	6	0	10	9	8	7	6
Volume	Tone	Mode	Gain	Drive	Level	Gain	Drive	Level	Treble	Middle	Bass	Presence	Master						

**TWEED**  
**DRIVE 1**      **BOOST**      **DRIVE 2**

50 ▲	3	4	5	6	7	Reverb	◀ OFF + ON + 1/2 ▶	SMOOTH	VOICE
○	2	1	9	8	7				
40 ▼	OFF 0	10							